



Index

PRODUCT DRAWINGS	1
PRODUCT CHARACTERISTICS	2
SYMBOLS & DISCLAIMER	3

Vesti


The Vesti is a dimmable stainless steel LED based closet rod, designed to provide functional lighting. The luxurious 'look & feel' make the liniLED® Vesti ideal for hotels, casino's, theatres, restaurants and even the (walk in) closet in your home.

The liniLED® Vesti is available in a round shape. Both models are equipped with a diffuse cover and a high quality liniLED® luminaire a combination that creates a beautiful homogenous light effect. The liniLED® luminaires come in colour temperatures from 2400K up to 6500K.

To provide an easy, seamless and clean installation, the liniLED® Vesti is complemented with concealed mounting brackets.

The liniLED® Vesti is available in standard lengths of 50, 75, 100, 125 and 150 cm. Other lengths available upon request.

Product drawings

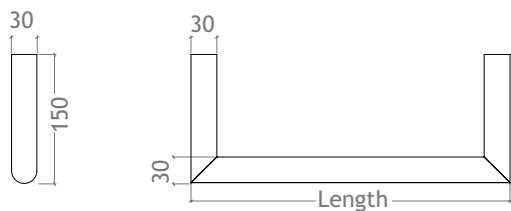

Product codes & characteristics

Appearance	Diffuse
Dimensions	30 x 150 x Length mm
Length	< 1500 mm
Colours	2400K, 2700K, 3000K, 4000K, 6500K
Power	9.7 W/m
Operation voltage	24 V DC
Protection	IP40
Materials	Polycarbonate cover/ Stainless steel AISI 304
Storage temperature	-20 °C ... 55 °C
Operating temperature	-20 °C ... 55 °C

Product code		Lighting colours	
16010	Vesti Round 500 mm	2400K	9.1 W/m
16011	Vesti Round 750 mm	2700K	9.6 W/m
16012	Vesti Round 1000 mm	3000K	9.0 W/m
16013	Vesti Round 1250 mm	4000K	9.0 W/m
16014	Vesti Round 1500 mm	6500K	9.0 W/m

Symbols



Manufacturer's declaration that the product meets the applicable EC directives.



Restriction of Hazardous Substances (RoHS): product complies with the RoHS directive and each homogeneous material does not exceed the limits for the materials mentioned under the RoHS directive (Pb, Hg, Cd, Cr6+, PBB and PBDE).



Protected against ingress of solid foreign objects ≥ 1.0 millimetres. Not-protected against ingress of water.



Electrical appliance class III: this product is designed to be supplied from an extra-low voltage (≤ 60.0 V DC or ≤ 42.4 V AC).



Operating voltage of 24 V DC.



System guarantee of 5 years when the complete system consist of liniLED® Products with the 5 year system warranty logo.

Disclaimer

The published information is checked to be as accurate as possible, however Triolight BV or any reseller of liniLED® cannot be held liable for any damages resulting from errors or outdated information. Triolight BV reserves the right to modify the information without informing the costumers. When this document is printed or downloaded, please check for the latest version on the internet, the most up to date information will be published on www.liniLED.com. This product should not be used in applications, devices or systems where incorrect operation of the product may result in personal injury (includes emergency lighting) without written permission from the board of Triolight BV. If nevertheless used in such applications, devices or systems Triolight BV cannot be held liable for any resulting injury.