


liniLED® Vesti

liniLED®

Instruction sheet

Ambient temperature = 25 °C

Description	Illuminated closet rod
Product code	ONT-02140
Appearance	Diffuse
Dimensions	30 x 150 x Length mm
Length	< 1500 mm
LED Strip	liniLED® PCB Warm White 3000K PSP
Power	9.7 W/m
Operation voltage	24 V DC
Protection	IP40
Materials	Stainless steel AISI 304 Polycarbonate cover
Operating temperature	-20 °C ... 55 °C

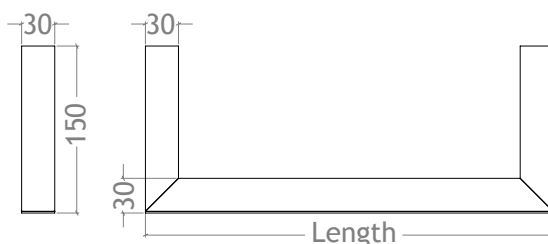

Safety instructions


Installation should be performed only by a qualified person or professional electrician
Install per National Electrical Code and local regulations
Read instruction sheet completely before installation
Failure to follow instruction sheet may void warranties

Package contents


1 liniLED® Vesti
1 Polycarbonate cover
1 Female connector / Male connector
4 Screws
2 Mounting brackets

Applications

Hospitals
Hotels
Offices
Residential
Retail

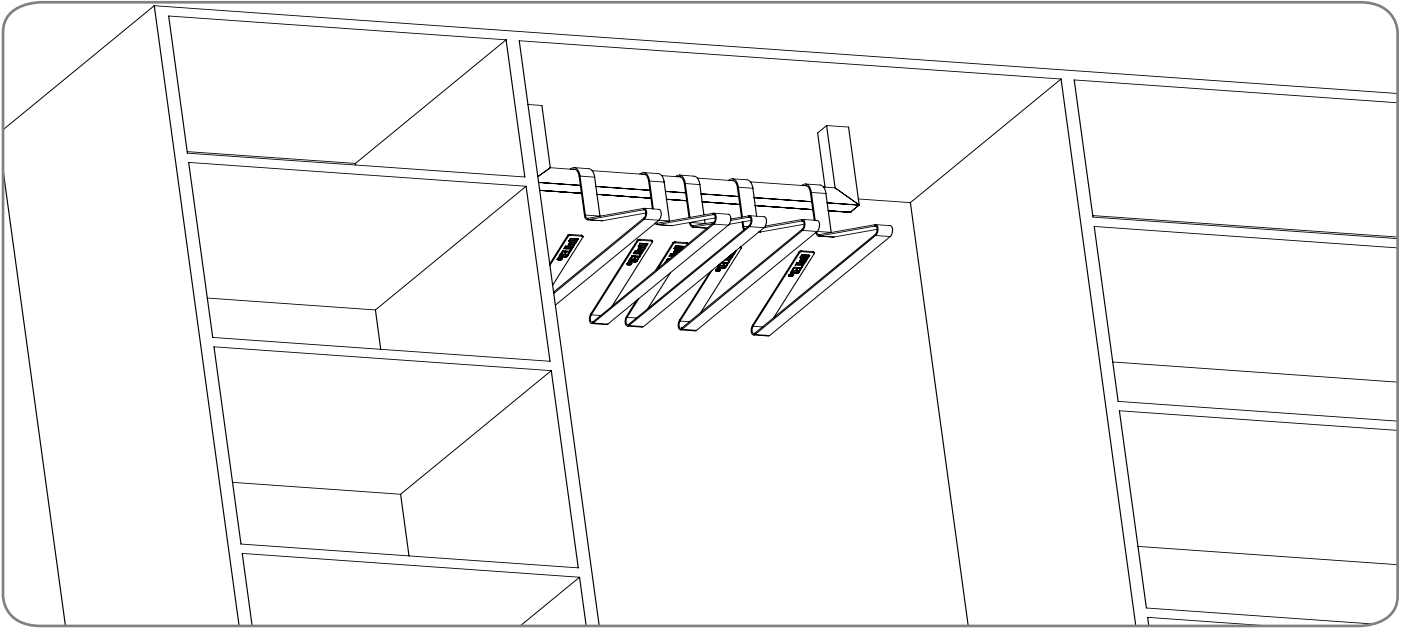

Step 1: Measure and mark the location of the liniLED® Vesti mounting brackets.
Step 2: Drill holes for fixing the brackets and cable.

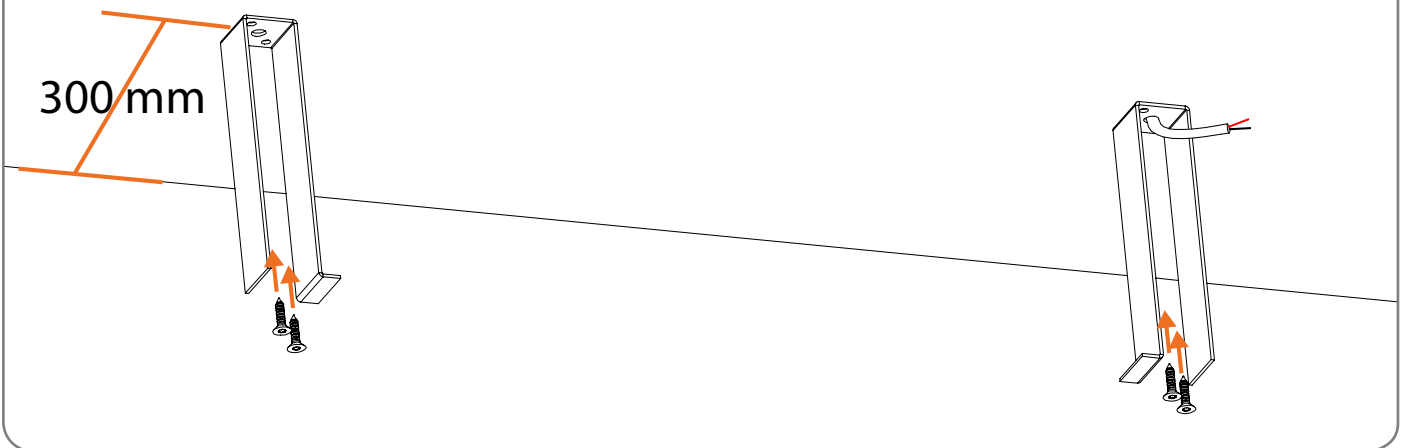

Connect the female screw terminal

